



**Shadow
Estimating
Services**

OFFSHORE

OIL & GAS CONSTRUCTION BROWNFIELDS UPGRADES

375 Pages with 5,308 +/- construction Norms / speeds

Offshore Construction Brownfields Upgrades



SHADOWESTIMATINGSERVICES.CO.ZA



Offshore Oil & Gas Construction Brownfields upgrades

375 Pages with 5,308.00 Norms +/- in this Book

The aim of this Manual/Book is Consistency for Offshore Oil & Gas Construction Green & Brownfields Projects, ranging from 10,000.00 Man-Hours to 100,000.00 Man-Hours. By applying the same norms /speeds and time standards for each item we can accurately measure our results every time.

All the norms / speeds are given in MATRIC Units of Measure (UOM)

Onshore Construction Onshore Green & Brownfields

\$ 550.00

The book/manual will bring consistency by applying the same norms/speeds for the same item which will help in measuring performance accurately. With the project factor explained, users will also know what to look for when assessing results.


The index is clear and highlights the relevant section of the electrical construction section. When you start the calculation of the BOM (Bill Of Materials)/BOQ (Bill Of Quantities), use a WBS (Work Breakdown Structure) to group the different man-hours section. This will provide you with the basic man-hours, and once the project factor is applied, you will obtain the project productive man-hours for each WBS Groups.

From this, we can then identify where the work fits within the project. Once this has been obtained, you can now calculate your **non-productive costs based on the man-hours**. If the project duration is not given, you could assume a reasonable timeframe (Not too long or too short and inform the client that the final feedback will be provided once the actual duration is confirmed).

When calculating the non-productive cost for personnel, keep in mind that they may be required to start **one to two months before the actual project start date. (For planning, organization, set up of the site establishment, accommodation etc).** Similarly, personnel may be needed for up to three months after the project close-out.

When reviewing the WBS/Activity man-hours, you will be able to see the number of supervisors required for each WBS/Activity.



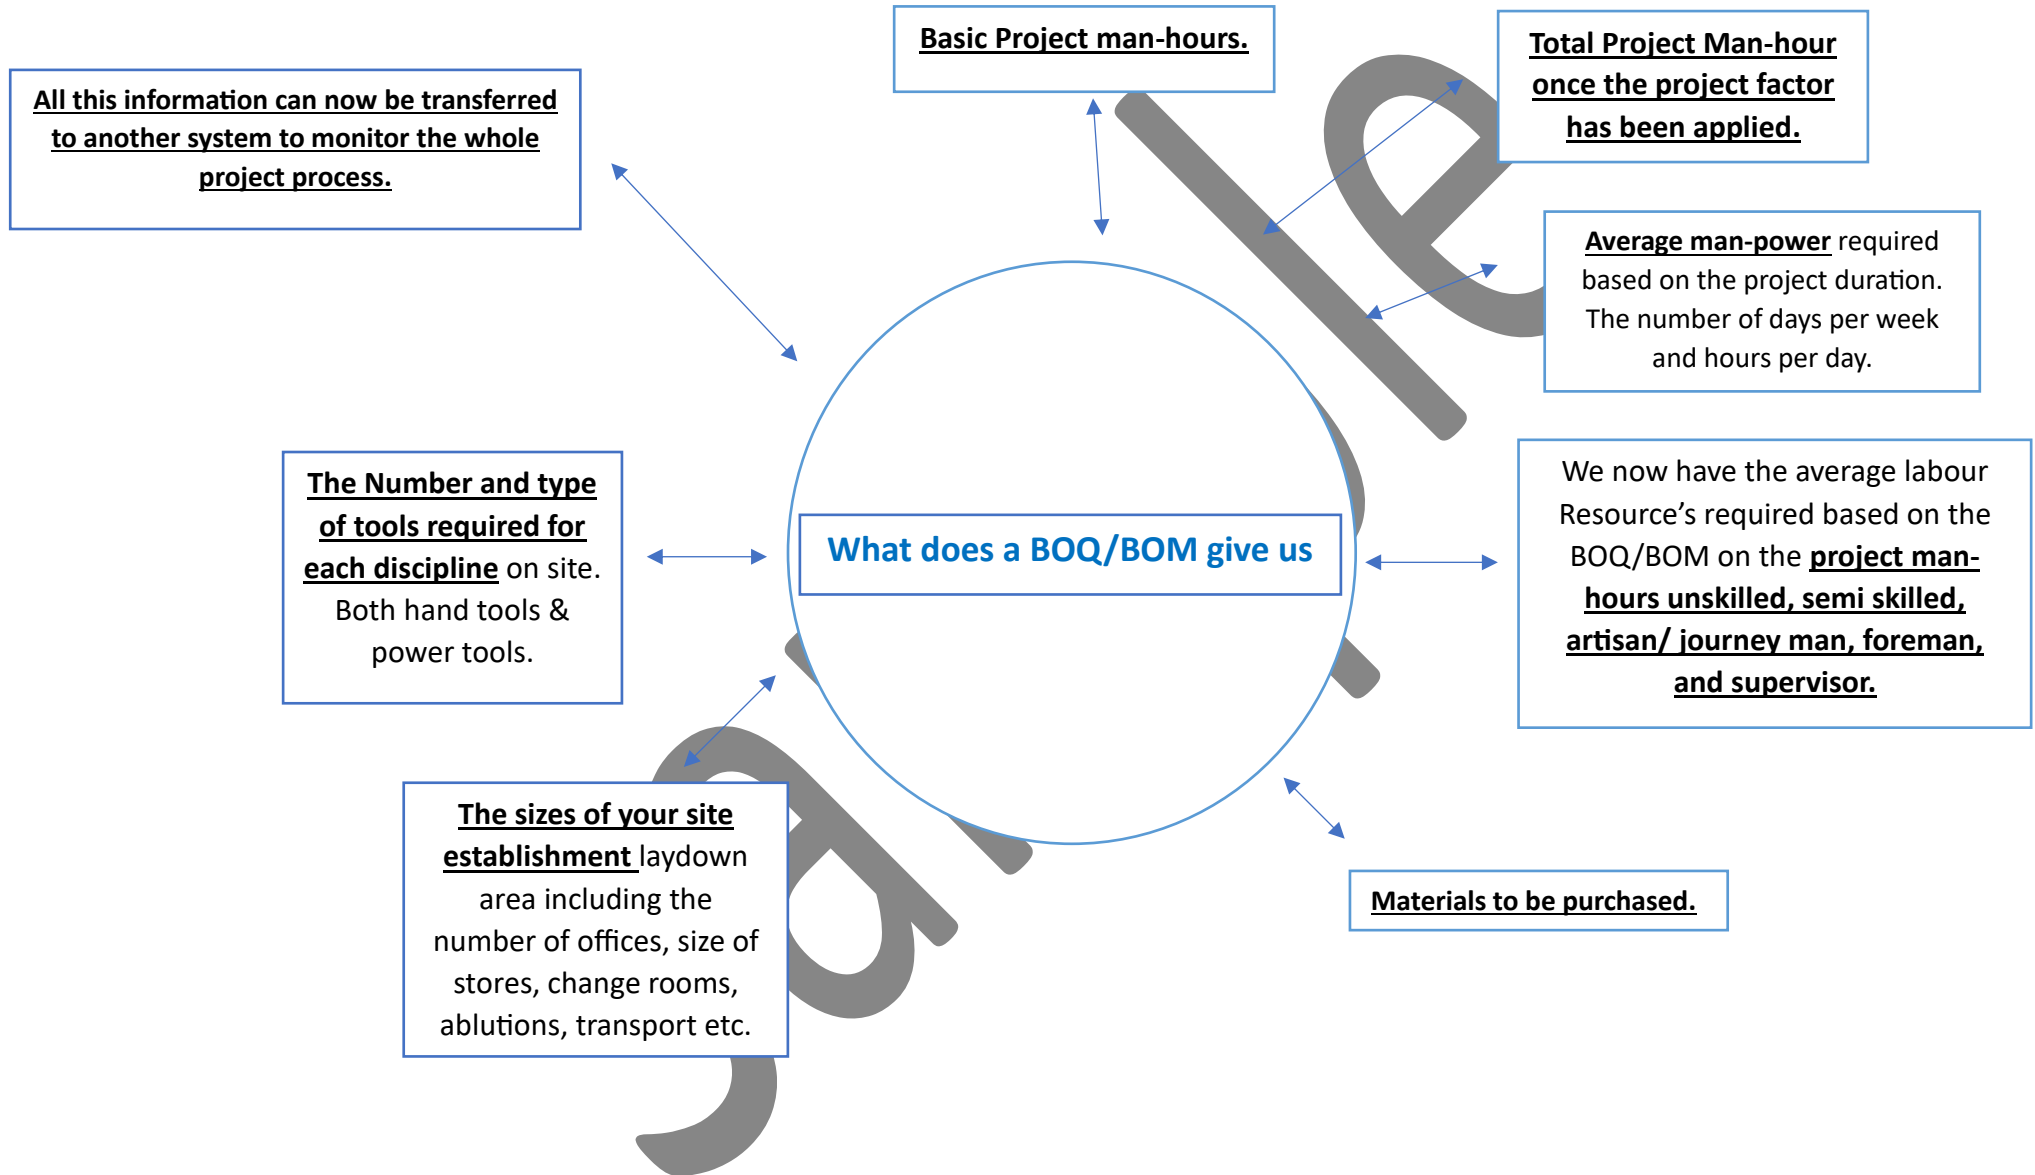

Offshore Oil & Gas Construction Brownfields upgrades

Includes Following

375 Pages with 5,308.00 Norms +/- in this Book

INDEX	Pages 4 to 17
Introduction & Preambles	Pages 18 to 28
Project Factor Country, Site, Individual Factors	Pages 29 to 52
Project safety	Pages 53 to 55
Why a WBS structurer breakdown	Pages 56 to 58
Basis of Norma	Pages 59 to 60
Carbon Steel Pipe work Offshore Fabrication Norms	Pages 61 to 131
Hydrotesting Contents Offshore and Norms	Pages 132 to 138
Structural Steel Install Offshore Norms	Pages 139 to 170
Scaffolding Offshore Norms	Pages 171 to 187
Plant & Machinery Offshore Norms	Pages 188 to 200
Insulation Norms	Pages 201 to 219
Painting Norms	Pages 220 to 229
Heating and Ventilation Offshore Norms	Pages 230 to 238
Electrical Installation Offshore Norms	Pages 239 to 281
Instrumentation Installation Offshore Norms	Pages 282 to 305
Fire and Gas Installation Offshore Norms	Pages 306 to 213
Electrical and Instrumentation Pre-Commissioning Offshore Norms	Pages 314 to 328
Architectural Accommodation Block	Pages 329 to 336
Project Safety	Pages 337 to 375



Introduction & Preambles

Preambles	Page 19
Definitions/Explanation	Pages 20 to 21
Establishment of Additional Norms.	Pages 21 to 22
Estimates exclusion	Pages 22 to 23
Application	Pages 23 to 24
All-Inclusive Norms	Pages 24 to 25
Abbreviations and Terms	Pages 25 to 28

2 Project Factor Country, Site, Individual Factors

We have three factors that cover all our projects outcome

Crew / Country factor

Index

Page 30

1)	Platform/ Crew / Country Factors	Page 31
2)	Site factor / Platform	Page 32
3)	Individual factor for each activity	Page 33
4)	Principle of applying of these Factors	Pages 34 to 36
5)	Country Factor as a%	Page 37
6)	Overall site Factor (OSF)	Pages 38 to 40
7)	Time Savings	Page 41
8)	Installation Procedures	Pages 41 to 43
9)	Standard Norms	Pages 44 to 47
10)	Overall Construction Productivity 29 countries	Pages 48 to 49
11)	Contingency	Page 49
12)	Covid Factor	Page 49
13)	Covid in General	Pages 50 to 52



Project safety

General

INDEX

Abbreviation

Pages 338 to 349

All Phase

Page 344

Conceptual Design (FEED) Phase

Page 352 to 350

Detailed Design Phase

Pages 363 to 355

Construction Phase

Pages 372 to 364

Commissioning Phase

Page 373

Closeout Phase

Page 374

Page 375

WBS (work breakdown structure) Construction Activities

Pages 57 to 58

Basis of Norma

Page 60



Pages 62 to 63

Carbon Steel Pipe work Offshore Fabrication Norms

1.1	Measurement	Page 64
1.2	Norms	Pages 64 to 66
1.3	Sub Section Description	Page 67

Pages 68 to 73

Tables

71.1	ALLOY MATERIAL ADJUSTMENTS	
1.2	Plain Cut ends of Pipe-90° Cut	Pages 74 to 76
1.3	Bevel End of Pipe 90°	Pages 77 to 78
1.4	Machine Sharping End of pipe /Dressing of pipe end	Pages 79 to 80
1.5	Thread End Of Pipe	Pages 81 to 82
1.6	Machine out Bore of Pipe	Page 83
1.7	Build Up end Of Pipe or Fitting	Pages 84 to 85
1.8	Tube Bending up to 90°	Page 86
1.9	Tube Bending Over 90°	Page 87
1.10	Butt Welds	Page 88
1.11	Socket welds	Pages 89 to 90
1.12	Make 90° Unreinforced Weld Branch Joint	Pages 91 to 92
1.13	Make 45° unreinforced weld Branch Joint	Page 93
1.14	Make 90° Reinforced weld Branch Joint	Pages 94 to 95
1.16	Fit Thread let Sockolet Nipolet Latrolet etc. see note below For Fitting connected at angles other 90° add 50%	Pages 96 to 97
1.17	Weld Slip-On Flanges	Pages 100 to 101
1.18	Make screwed Joints - Per Connection	Page 102
1.19	Soldering Non-Ferrous Fittings for field Fabrication per Connects	Page 103
1.20	Pre-Heating for Butt And Flang Welds up 400°F	Page 104
1.21	Full Local Stress Relieving up to 1400° F (PWHT)	Pages 105 to 106
1.22	Radiographic Testing of welds (a) For Branch Below 6° add 75%	Page 107
1.23	Magnetic Partial Inspection of welds	Page 108
1.24	Liquid or Dye Penetrant Inspection of Butt Welds	Page 109
1.25	Ultrasonic Inspection	Page 110
1.26	Selecting Spool Pices Handling and Erection including Trial Fit into Position Including all Ancillaries on Pipe Supports (Jointing to System1.15) Make 45° Reinforced weld Branch Joint and Pipe Supports Measured Separately	Page 111
		Page 112
		Pages 98 to 99



PIPING INDEX**Table 1****Carbon Steel Pipe work Offshore Fabrication Norms**

1.27	Installation of Valves	Pages 113 to 114
1.28	Installation of Spring Hangers and Proprietary	Pages 115
1.29	Installation of Prefabricated Pipe Support	Pages 116 to 117
1.30	Make Bolted Flange Joint on to erected Pipework (A) For Standard Cast iron Use 150# Psi Norms (B) For Extra Heavy Cast Iron Use 300# Psi	Pages 118 to 119
1.31	Installation of Grayloc Hub Clamp	Pages 120 to 121
1.32	Remove off Erected Pipe Works	Pages 122 to 123
1.33	Remove off Valves From Erected Pipe works a) Use 150 psi norms for Standard Brass or Iron Valves. (b) Use 300 psi norms for Extra Heavy Brass or iron Valves	Pages 124 to 125
1.34	Remove Valve from Erected Pipework and Reinstate including Bolting and Gaskets	Pages 126 to 127
1.35	Release Flanged Joint on Erection Pipe work (a) for Standard Cast Iron Use 150# Psi Norm (b) for extra heavy Cast Iron us 300# Psi	Page 128
1.36	Installation of U "bolts" Clamps and Shoes to Piping	Page 129
1.37	Installation of Plastic Pipe (PVC UPVC or Similar) Fittings Saddles & Valves	Pages 130 to 131

Table 2- Hydrotesting Contents Offshore and Norms

	Index	Page 133
2.1	Measurement	Page 134
2.2	Norms	Page 134
2.3	Description	Page 135
2.4	Norms for break flanged	Page 135

Table 4

4,00	Hydrotesting Operation Offshore - Pre and Post Test	Page 136
5,00	Pressurisation and Curing leaks	Page 137
6,00	Test for Pressure Envelopes within a System	Page 138

Table 3 Structural Steel Install Offshore Norms

	Index	Pages 140 to 141
	Generally,	Page 142



	Measurement	Page 142
	Norms	Pages 143 to 145
3.1	Install Prefabricated Structures by Skidding/Sliding	Page 146
3.2	Install Prefabricated Structures by use of Platform Crane or HLV	Page 147
3.3	Install Mild Steel Plate (as Flooring and Bulkheads etc.)	Pages 148 to 150
3.4	Install 35mm Open Mesh Flooring	Pages 151 to 152
3.5	Install prefabricated mesh safety panels	Pag 153
3.6	Installation of Shims on Bearing Pedestal Points	Page 154
3.7	Cutting, Bolting, Handling and NDT for Steelwork	Pages 155 to 156
3.8	Welding Plate/ Steelwork	Page 157
3.9	Handrails, Guardrails etc, Offshore	Page 158
3.10	Installation of Cladding	Page 159
3.11	Installation of Cable Transit Frame	Pages 160 to 162
3.12	Installing Bestobell Seals	Page 163
3.13	Fitting of Pipe Penetrations (Bestobell Seals)	Page 164

Table 3 Structural Steel Install Offshore Norms

3.14	Cutting Holes for Pipes	Pages 165 to 166
3.15	Grinding All Plate thicknesses	Page 167
3.16	Drilling Holes	Pages 168 to 169
3.17	Install Small Steel Items by the use of Adhesives	Page 170

Scaffolding

	Index	Pages 172 to 173
4,1	Definition	Page 174
4,1,1	Independent Scaffolding	Page 174
4,1,2	Tower Scaffolding	Page 175
4,1,3	Birdcage Scaffolding	Page 175
4,1,4	Cantilever Scaffolding	Page 176
4,1,5	Suspended Scaffolding	Page 177
4,2	Scaffold Classification	Page 178
4,3	Norm Tables	Page 179
4,4	Measurements	Page 180
4,5	Estimates	Page 181
4,5,2	Example	Pages 182 to 183
4,6	Scaffolding Contents	Page 183
4,1	Conventional Scaffolding - GENERAL PURPOSE TOPSIDES	Page 184



	Scaffolding Contents	
4,2	Conventional Scaffolding - HEAVY DUTY – TOP Sides	Page 185
4,3	Conventional Scaffolding- HEAVY DUTY - JACKET	Page 186
4,4	HAKI System Scaffolding - TOPSIDES	Page 187
Tables 5	Plant & Machinery Offshore Norms	
	Index	Page 189
5,1	Generally	Page 190
5,2	Measurement	Page 190
5,3	Norms	Pages 192 to 191
5,4	Plant and Machinery Contents	Page 192
Tables 5	Plant & Machinery Offshore Norms	
5.1	installation of equipment by weight / mass	Pages 193 to 194
5,2	Install Items of Plant and Equipment Offshore	Page 195
5,3	Remove Items of Plant and Equipment Offshore	Page 196
5,4	Inspection of vessels and tanks	Page 197
5.5	Install Pump Into Caisson or leg (Motor Rating kW)	Page 198
5,6	Proof Load Testing	Page 199
5.7	Inspection of Internals	Page 200
	Insulation Norms	
	Index	Page 202
6,1	Generally	Page 203
6,2	Measurement	Page 203
6,3	Norms.	Page 204
6,4	Insulation Contents	Page 204
Tables 6		
6.1	Hot Insulate Piping	Pages 205 to 206
6.2	Hot Insulate Equipment (up to and including 80mm thk.)	Page 207
6.3	Hot Insulate (over 80mm and up to and including 100mm thk.)	Page 208
6.4	Cold Insulate Piping	Pages 209 to 210
6.5	Cold Insulate Equipment (up to and including 80mm thk.)	Page 211
Table 6	Insulation Norms	
6.6	Cold Insulate Equipment (over 80mm and up to and	Page 212



	including (100mm thk.)	
6.7	Pump Insulation (Hot and Cold)	Page 213
6.8	Ductwork Insulation	Page 214
6.9	Insulation for Fire Protection	Page 215
6.10	Insulation Removal (Hot and Cold)	Page 216
6.11	Repair of Rockwool fire protection and insulation of HVAC Ductwork	Page 217
6.12	Install prefabricated cover plates and apply fire protection to redundant pipe penetrations	Pages 218 to 219

Table 7 Painting Norms

	Index	Page 221
7,1	Measurement	Page 222
7,2	Norms	Pages 222 to 223
7,3	Definitions	Page 223
7,4	Painting Contents	Page 223

Table 7

7.1	Touch Up and Repainting	Page 224
7.2	Painting on Pipework Between each coat § Prior to first coat	Pages 225 to 228
7.3	Painting on Surfaces of Steelwork Between each coat § Prior to first coat	Page 229

Table 8 - Heating and Ventilation Offshore Norms

	Index	Page 231
8,1	Generally	Page 232
8,2	Measurement.	Page 232
8.3	Norms	Page 233

Table 8

8.1	Installation of Pre-Fabricated Ductwork (Internal and External), in all materials, plus Supports	Page 234
8.2	Installation / Erect Equipment associated with Ductwork	Pages 235 to 236
8.3	Make Bolted Joints between Flanges of Ductwork	Pages 237 to 238

Table 9 - Electrical Installation Offshore Norms

	Index	Pages 240 to 241
9,1	Generally	Page 242
9,2	Measurement	Pages 242 to 243



9,3	Norms	Pages 243 to 245
9.4	Electrical Content	Page 246
Tables 9		
9,1	Pulling/Laying/Draw of PVC/SWA/PVC Cable and Run on Cable Rack	Pages 247 to 248
9,2	Termination and Gland off of PVC/SWA/PVC Cable	Pages 249 to 250
Table 9 - Electrical Installation Offshore Norms		
9,3	Jointing / Splicing of PVC/SWA/PVC/PVC Cables	Pages 251 to 252
9.4	Termination and Gland off of Instrument and Fire and Gas Cable	Pages 253 to 254
9,5	Jointing / Splicing of Instrument and Fire/Gas Cables	Page 255
9,6	Install and Terminate Fibre-Optic Cables	Page 256
9.7	Compression / Stuffing Glands of Un-Armoured Cables	Page 257
9,8	Cable Test and Check Sheet Completion of PVC / SWA / PVC Cabling	Pages 258 to 260
9.9	Cable Test and Check Sheet Completion of Instrument Fire & Gas Cabling	Pages 261 to 262
9.10	Electrical Construction 'A' check sheets (Additional to items covered by installation Norms.)	Page 263
9.11	Norms for Pulling/Laying /drawing and glanding cables other than PVC/SWA/PVC	Page 264
9.12	Galvanised Conduit	Page 265
9,13	Earthing	Page 266
9.14	Select and Erect of Cable Tray, Ladder Racking etc Complete (Stainless Steel)	Page 267
9.15	Installation of Cable Transit Frame	Pages 268 to 269
9.16	Installation of various Outlets, light Fittings and Sundries	Page 270
9,17	Installation of various Outlets, lamps, Light Fittings and Sundries All necessary handling, assembling	Pages 271 to 272
9,18	Installation of Junction Box	Page 273
9.19	Installation of Trace Heating	Page 274
9.20	Sealing /Closing / Filling of Cable Penetrations	Page 275
9,21	Miscellaneous Electrical Items	Page 276
9.22	Removal of Redundant Cable Abandonment PVC/SWA/PVC Cables	Pages 277 to 279



9.23	Removal of Redundant Cable Abandonment Instrument and Fire & Gas Cable.	Pages 280 to 281
------	--	------------------

Table 10 Instrumentation Installation Offshore Norms**Index****Pages 284 to 285**

Note: The Preambles apply to Sub Sections 9, 10 and 11 as referenced

10,1	Norms for the installation of cabling and associated items related to instrumentation work will be shown in the norms for Electrical Installation. Sub-Section 9	Page 285
10.2	Measurement	Page 285
10.3	Norms	Page 285
Table 10		
10.1	1/4" / 6mm OD Nylon Single and Multicore Instrument Tubing	Page 286
10.2	1/2" / 12 mm OD Nylon Single and Multicore Instrument Tubing	Page 287
10.3	Stainless Steel, Monel, etc .. Instrument Tubing	Page 288
10,4	Instrument Stand I Support Installation	Page 289
10,5	Flow Instruments Installation	Pages 290 to 291
10,6	Level Instrument Installation	Pages 292 to 293
10,7	Pressure Instruments Installation	Pages 294 to 295
10,8	Pressure Indicator	Page 296
10,9	Temperature Instruments Installation	Pages 297 to 298
10,10	Miscellaneous Instrument Installation	Pages 299 to 300
10,11	Fabrication and Installation of Trifoliate Labels	Page 301
10,12	Hydrostatic Testing and Inspection of Stainless-Steel Monel, etc .. Process Tubing	Page 302
10,13	Solution film Testing on Installed pneumatics Tubing	Page 303
10,14	Instrument Valve Testing	Page 304
10,15	Cold Loop Checking	Page 305

Table 11 ,1 Fire and Gas Installation Offshore Norms**Index****Page 307**

11.1	Generally	Page 308
11.2	Measurement	Page 308
11.3	Norms	Page 308
11.4	Passive Fire Protection Content	Page 308



Table 11 ,1 Fire and Gas Installation Offshore Norms**Table 11**

11.1	Installation of Durastee / Duraclad Panels	Page 309
11.2	install Fireproof Enclosures to ESD Valves / cable chain / cable slap	Page 310
11,3	Install of Fire and Gas Equipment	Page 311
11.4	Halon Detector	Page 312
11.5	Apply Fire Protection Tiles Passive Fire Protection	Page 313

Table 12 Electrical and Instrumentation Pre-Commissioning Offshore Norms

12.1	Introduction	Page 316
12.2.1	Mechanical Completion	Pages 316 to 321
12.2.2	10 Vendor Specialist commissioning hours (Vendor Support)	Page 321
12.3	Summary	Page 321

Table 12

12.1	Electrical Pre-Commissioning	Pages 322 to 324
12.2	Instrument Equipment Pre-Commissioning	Page 325
12.3	Instrument Loop Checks	Page 326
12.4	HV AC Pre-Commissioning	Page 327
13.0	ARCHITECTURAL ACCOMMDATION BLOCK	

Index

		Page 330
	General,	Page 331
	Measurement	Page 331
	Norms	Pages 332 to 333
	Architectural Contents	Page 333
13.1	Description Install Suspended Ceilings	Page 334
13.2	Description: Install Walls and Floors	Page 334
13.3	Description: Install Doors	Page 335
13.4	Furniture and Fittings	Page 335
13.5	Install signs	Page 336



Technical Safety

Short Index

Pages 338 to 349

Abbreviation

Page 338

14.1	All Phase Technical Safety Detail Index	Pages 350 to 354
14.2	Conceptual Technical Safety Detail Index Detail Index	Pages 355 to 363
14.3	Detailed Technical Safety Detail Index Detail Index	Pages 364 to 372
14.4	Construction Phase Technical Safety Detail Index	Page 373
14.5	Commissioning Phase Technical Safety Detail Index	Page 374
14.6	Closeout Phase Technical Safety Detail Index	Page 375

